

# Style, size and power!

Not many filter units can compare to the size or performance of our hand held power filter unit.


This little powerhouse will accept various filter media sizes to meet your application requirements.

Motor is ½ hp, 115VAC, TEFC.  
Pump is rated for oil viscosities of 600 cSt at 100 deg. F.

**Ideal for flushing small gearboxes and/or lube systems. Supplied with suction and discharge hoses with QD's.**

**When space is limited for use or storage, our Compact Series Units are appealing in both style and performance.**



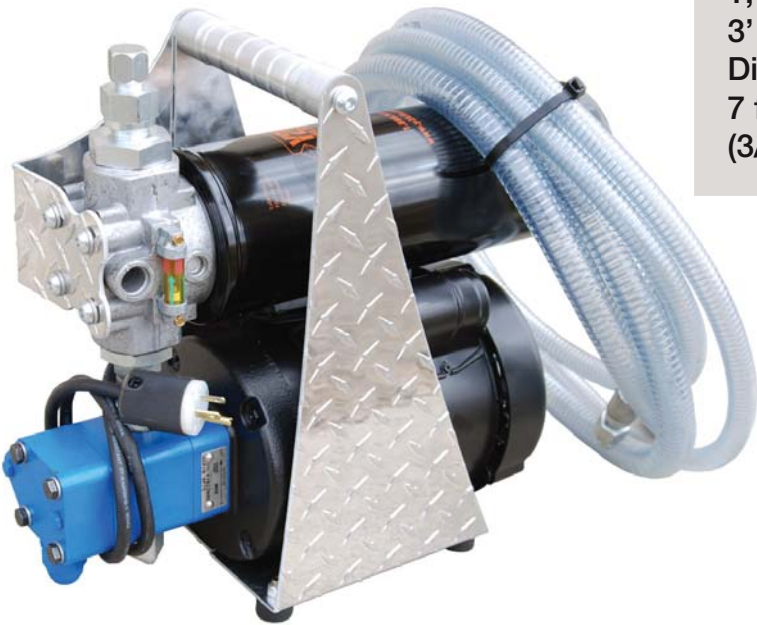

Specs:  
 1/2 HP Motor with Aluminum diamond plate frame  
 1, 2.5, 5 GPM Pump(s)  
 3' electric cord with 3 prong plug  
 Differential visual pressure indicators  
 7 ft Transfer hoses/quick disconnects  
 (3/4" suction and 1/2" discharge hoses)

*Compact Filtration Units*

When electricity is not available...  
 use compressed air.  
 Varying the compressed air input,  
 varies the pump flow (gpm)



Specs: Electric: 1 HP Motor with TEFC frame  
 - 115VAC  
 1,2.5, GPM Pump  
 3' electric cord with 3 prong plug  
 Particulate or Water Removal element available  
 Differential visual indicators,  
 7ft transfer hoses, quick disconnects  
 (3/4" suction & 1/2" discharge)  
 and steel dust plugs.



All Y2K Filter carts come standard with Visual Delta P Indicators. When the color changes, please change the element.

## Y2K Fluid Power

3500 North St. Paul Ave.,  
 Sioux Falls, SD 57104  
 888.925.8882  
 605.338.9982  
 www.y2kfluidpower.com



**888.925.8882**  
**www.y2kfluidpower.com**