


# Bulk Fuel and Lube Filtration

# P1066



4 micron lube filter

Maximum Working Pressure:	350 PSI/2413 kPa/24.1 bar
Rated Static Burst:	800 PSI/5520 kPa/55.2 bar
Maximum Flow Range:	65 gpm/246 lpm
Operating Temperature:	-40F to 190F/-40C to 88C
Target Iso Cleanliness:	14/13/11
Iso Filter Efficiency:	>4 micron @ Beta 2000
Typical Fluid Applications:	Diesel fuels and thin oils
Contains Viton seals and epoxy potting	

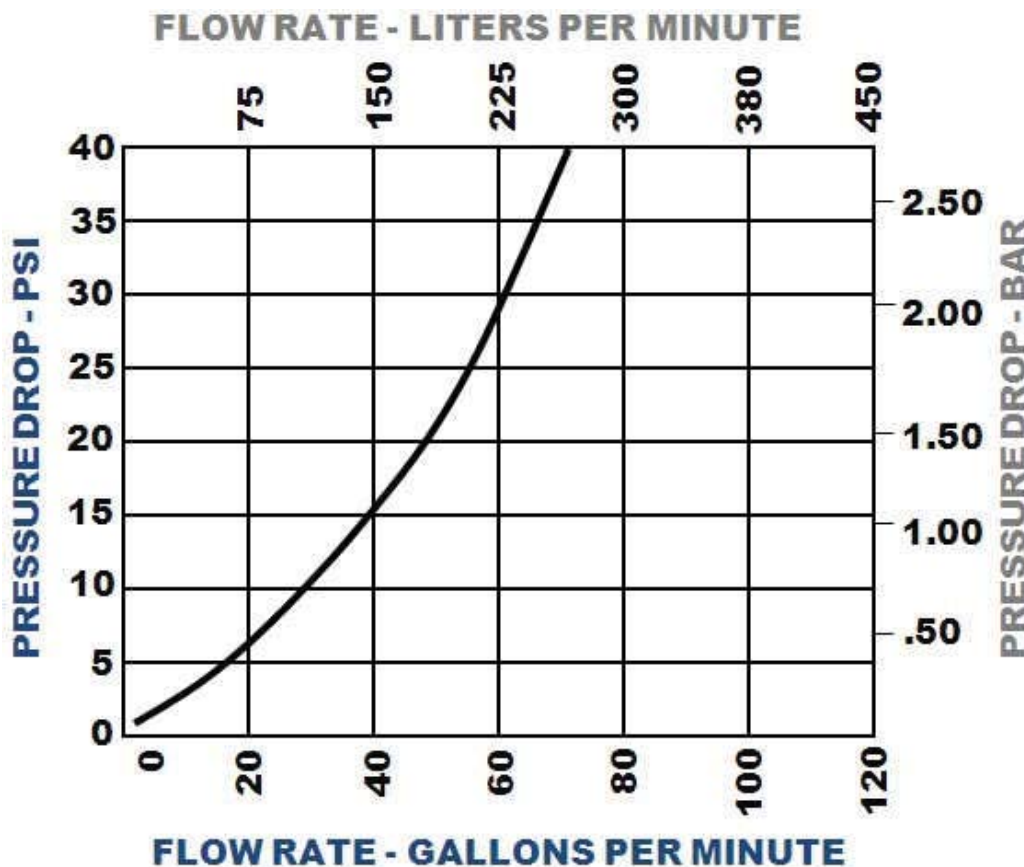

Note: All flow measurements were made with 32 cSt (150 SSU)  
 Fluid at 100F (38C) and 0.9 specific gravity



**Y2K FLUID POWER**  
 3500 N. St. Paul Ave.  
 Sioux Falls, South Dakota 57104

[www.y2kfluidpower.com](http://www.y2kfluidpower.com)

888.925.8882