

D SERIES FILTER CART

Simple & Powerful!

The Y2K HT-D Series Filter Cart is our signature filter cart and is an excellent choice for "off-line" filtration in a wide variety of settings. Extremely mobile and lightweight, this filter cart has all the power needed for filtering oil viscosities up to 600cSt (ISO VG 680). This filter cart is completely customizable to fit all of your needs.

Typical Applications:

- Filtering contaminated systems
- Flushing new or repaired systems
- Pre-filtering new oil
- Transferring oils
- Topping off reservoirs
- Collecting oil samples for analysis
- Dispensing new oil

3620 North Lewis Ave., Sioux Falls, SD 57104 | 888.925.8882 | y2kfiltration.com



D SERIES FILTER CART

Performance:

For filtering mineral and synthetic based oils (hydraulic oils, gear oils and turbine oils) with a maximum operating viscosity range of ISO VG 680 (3000ssu/648cSt) at 100°F within ambient temperature ranges of -15°F to 150°F.

Standard Features:

Frame:	Carbon steel with drip pan; flat free tires		
Paint:	Multiple color options available		
Motor:	1HP, 115vac, 60Hz or Pneumatic		
Filter Heads:	Medium pressure, cast aluminum heads		
Pump:	Heavy duty, cast steel gear pump. Available in 1, 2, 5 and 10 \mbox{GPM}		
Connections:	Various quick connect options available		
Hoses:	7ft. Clear PVC, steel reinforced hose or hydraulic hose		
Power Switch:	Sealed on/off power switch		
Cord Reel:	40ft. retractable electric cord reel		
Filter Indicators:	Slide bar indicators trigger at 50psid when elements need to be changed		
Pump Relief:	Opens at 150psi		
Weight:	Approx. 150lbs (will vary depending on options)		
Dimensions:	Approx. 23"L x 22"W x 52"H		


Replacement Elements:

Part Number	BETA Rating	Desired Cleanliness Level (ISO Code)
P1066	64(c)=2000	14/12/9 - 13/11/8
P1065	ß7(c)=2000	18/16/13 - 15/13/10
P1063	ß10(c)=1000	19/17/14 - 18/16/13
P1064	ß25(c)=2000	20/18/15 - 19/17/14
P1048WR	Water Removal	

All D Series elements measure 5" x 14".

Components:

Item Number	Description	Qty.
1	Frame	1
2	Motor	1
3	Pump	1
4	Filter Head	2
5	Filter Element	2
6	Filter Indicator	2
7	Switch On/Off	1
8	Sample Port	2
9	Cord Reel	1
10	Differential Gauge	1

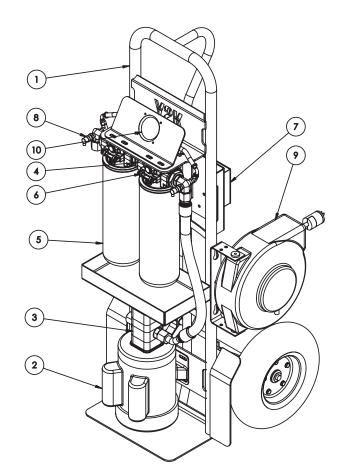

3620 North Lewis Ave., Sioux Falls, SD 57104 888.925.8882 y2kfiltration.com